

5050 Series

CRI Available
80 /90 /98

[60LEDs/M] (14.4W/M)




- Source by 5050 Top LED
- Self-encapsulated design offer five optional white light from 2300-6500K and Red, Green, Blue, Yellow
- CRI 80+ , CRI 90+ and CRI 98+ are available




Data	24V	12V
Voltage	24V DC	12V DC
Power	14.4W/m	14.4W/m
Current	0.6A/m	1.2A/m
Max. LM. Flux	1380LM/m	1380LM/m
Dimensions	5000x10x1.8mm (196.85"x0.39"x0.08")	5000x10x1.8mm (196.85"x0.39"x0.08")
Unit Length	100mm/ 6LEDs (3.94"/ 6LEDs)	50mm/ 3LEDs (1.97"/ 3LEDs)
LED Qty.	60LEDs/m, 16.67mm (0.66") LED pitch	60LEDs/m, 16.67mm (0.66") LED pitch
Waterproof IP	20,54,65,67,68	20,54,65,67,68

Ra	CCT.	Lm/M		Lm/M	
>80	5700-6500K	1380	WW-FLS102T50SW060B-24(WCP)-HR	1380	WW-FLS102T50SW060B-12(WCP)-HR
	3700-4250K	1380	WW-FLS102T50NW060B-24(WCP)-HR	1380	WW-FLS102T50NW060B-12(WCP)-HR
290-320K	260-290K	1140	WW-FLS102T50WW060B-24(WCP)-HR	1140	WW-FLS102T50WW060B-12(WCP)-HR
	200-240K		WW-FLS102T50SR060B-24(WCP)		WW-FLS102T50SR060B-12(WCP)
●	620nm-630nm	270	WW-FLS102T50SR060B-24(WCP)	270	WW-FLS102T50SR060B-12(WCP)
●	515nm-525nm	720	WW-FLS102T50SG060B-24(WCP)	720	WW-FLS102T50SG060B-12(WCP)
●	465nm-475nm	180	WW-FLS102T50SB060B-24(WCP)	180	WW-FLS102T50SB060B-12(WCP)
●	585nm-595nm	270	WW-FLS102T50AY060B-24(WCP)	270	WW-FLS102T50AY060B-12(WCP)


Photometric Diagrams



Illuminance Distribution



Installation Diagram

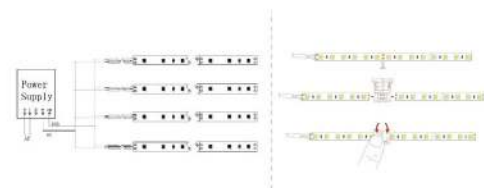

Suitable Accessories



AL.Profiles	Surface-mounted	Recessed
WW-AP081S WW-AP150B WW-AP1612B WW-AP1616B WW-AP1709B WW-AP1709C	WW-AP2531 WW-AP3030 WW-AP2114B	WW-AP2507B WW-AP2126 WW-AP2811

■ Recommend