

High Voltage Series -AC220V



2835 Top LED -[120 LEDs/M] (10W/M)

IP65

CRI Available
80/90/98




- Assembled by 2835 Top LEDs
- 220V AC power input, easy for direct plug-in/out without additional power supply
- Soft PVC housing with thick firm, good corrosion resistance and electrical insulation
- Self-encapsulated design offer five optional white light from 2300-6500K
- CRI 80+ , CRI 90+ and CRI 98+ are available



Data	
Voltage	220V AC
Power	10W/m
Current	0.045A/m
Max. LM. Flux	1100LM/m
Dimensions	50000x17.5x7.5mm
Unit Length	1000mm/ 120LEDs (39.37"/ 120LEDs)
LED Qty.	120LEDs/m, 16.67mm (0.66") LED pitch
Waterproof IP	65

Ra	CCT.	Lm/M	
>80	5700-6500K	1100	HVFLST2S3C-50-EU/CN
	3700-4250K	1100	HVFLST2N3C-50-EU/CN
	2900-3200K	1100	HVFLST2W3C-50-EU/CN
	2600-2900K		
	2300-2600K		

Structural drawing




IP 65

Accessory


Full set accessory

1. Transformer
2. End cap
3. Quick connector
4. Plastic clip

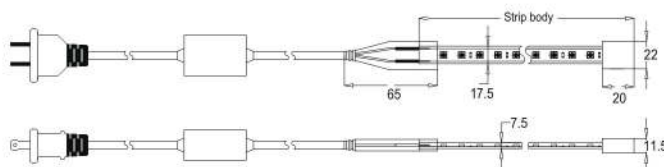


Cutting Unit

- 50M Roll
- ✂ CUT Every 500mm



Photometric Diagrams



Illuminance Distribution

