

## High Voltage Series -AC220V


### 5050 RGB Top LED- [60 LEDs/M] (8.3W/M)

IP65

**RGB**



- Assembled by 5050RGB Top LEDs
- 220V AC power input, easy for direct plug-in/out without additional power supply
- Soft PVC housing with thick firm, good corrosion resistance and electrical insulation

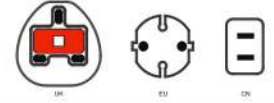


Data	
<b>Voltage</b>	220V AC
<b>Power</b>	8.3W/m
<b>Current</b>	0.04A/m
<b>Max. LM. Flux</b>	194LM/m
<b>Dimensions</b>	5000x14.3x7.5mm (1968.5"x0.56"x0.3")
<b>Unit Length</b>	1000mm/ 60LEDs (39.37"/ 60LEDs)
<b>LED Qty.</b>	60LEDs/m, 16.67mm (0.66") LED pitch
<b>Waterproof IP</b>	65

Ra	CCT.	Lm/M
	194	HVFLST5C3C-50-EU/CN
R:618-628/G:518-528/B:464-474		

#### Structural drawing

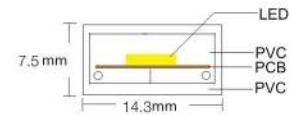

IP 65

#### Accessory



##### Full set accessory

1. Transformer
2. End cap
3. Quick connector
4. Plastic clip




#### Cutting Unit


- 50M Roll
- ✂ CUT Every 1000mm

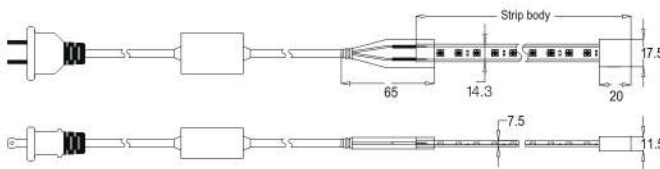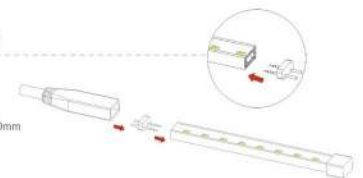

#### Photometric Diagrams

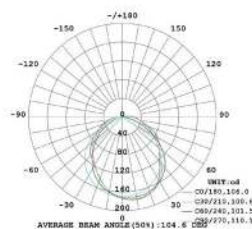

#### Illuminance Distribution

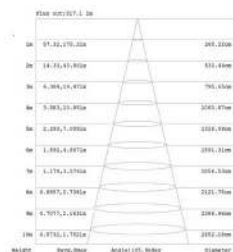

Content  
Waterproof  
Strip Portfolio  
Constant-Current  
High Efficacy  
EPI-Plus  
2835  
2016  
2110  
5050  
3528  
Side-Bright  
3014  
Multi-Color  
Functional  
Linear Light Source  
AC  
Neon Flex  
Accessories  
Packs  
Linear Lighting