

**Dim to Warm Series**  
**[168LEDs/M] (15W/M)**



White Dimm 1800K to 6500K  
Indoor 120°  
24V DC 5M REEL

Dimm 1800K 6500K

CRI Available 80/ 90 /98

**1800-6500K**

- Source by dual 2835 Top LED
- Constant voltage dim to warm, suitable for PWM system
- Color temperature and brightness can be adjusted at the same time by using PWM dimmable power and dimmable controller
- CRI 80+ and CRI 90+ are available


Available B 20 S 54 K 65 F 65 R 67 RW 67 68




Data	
<b>Voltage</b>	24V AC
<b>Power</b>	15W/m
<b>Current</b>	0.63A/m
<b>Max. LM. Flux</b>	1710LM/m
<b>Dimensions</b>	5000x10x1.2mm (196.85"x0.39"x0.05")
<b>Unit Length</b>	100mm/ 6LEDs (3.94"/ 6LEDs)
<b>LED Qty.</b>	120LEDs/m, 16.67mm (0.66") LED pitch
<b>Waterproof IP</b>	20,54,67

Ra	CCT.	Lm/M	
>80	5700-6500K + 1800-2000K	1710	WW-FLS102T29WS120B-24(WCP)-HR-DTW


**Photometric Diagrams**



**Illuminance Distribution**



**Installation Diagram**

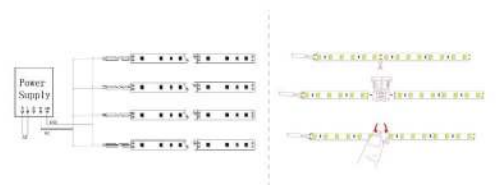

AL.Profiles		Surface-mounted				Recessed	
WW-AP0813	WW-AP1506	WW-AP1612B	WW-AP1616B	WW-AP1709B	WW-AP1709C	WW-AP2507B	
WW-AP1714	WW-AP1804	WW-AP1918	WW-AP1919B	WW-AP2114B	WW-AP2531	WW-AP3030	WW-AP2126
							WW-AP2811

■ Recommend

Content  
Waterproof  
Strip Portfolio  
Constant-Current  
High Efficacy  
Effi-Plus  
2835  
2016  
2110  
5050  
3528  
Side-Emit  
3014  
Multi-Color  
Functional  
Linear Light  
Source  
AC  
Neon Flex  
Accessories  
Packs  
Linear Lighting