


Under Water Series (CV)

Silicone

CRI Available
80/ 90 /98

10mm-2835 [140LEDs/M] (10W/M)

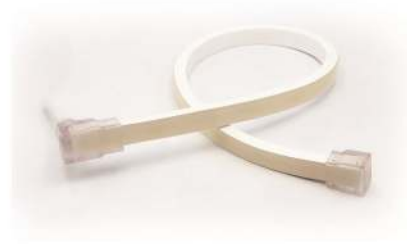

IP68




Constant Voltage


- Dual color silicone extrusion, anti-yellowing and salt spray resistance
- Foursquare structure surface with 100° beam angle
- Top emitting, bendable direction vertically
- Uniform illumination without dot spot
- IP68 waterproof and suitable for indoor and outdoor application




Silicone coating, UV Resistant, Yellowing Resistant, Flame Resistant



Foursquare surface




Size: 15X10

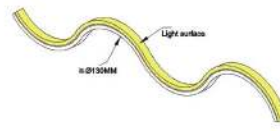


Voltage	24V DC
Power	10W/m
Current	0.42A/m
Max. LM. Flux	900LM/m
Dimensions	Length x 15x10mm
Unit Length	50mm/ 7LEDs (1.97"/ 7LEDs)
LED Qty.	140LEDs/m, 7.14mm (0.28") LED pitch
Waterproof IP	68

Photometric Diagrams

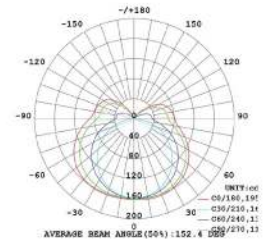

Ra	Lm/M		
>80	6000K	900	WW-FLS102T28SW140TC-24(WCP)-HR-100
	4000K	900	WW-FLS102T28NW140TC-24(WCP)-HR-100
	3000K	900	WW-FLS102T28WW140TC-24(WCP)-HR-100
	2500/2700K	870	WW-FLS102T28WW140TC-24(WCP)-HR-100
●	620nm-630nm	200	WW-FLS102T28SR140TC-24(WCP)-100
●	515nm-525nm	780	WW-FLS102T28SG140TC-24(WCP)-100
●	465nm-475nm	155	WW-FLS102T28SB140TC-24(WCP)-100
●	585nm-595nm	175	WW-FLS102T28AY140TC-24(WCP)-100

Illuminance Distribution

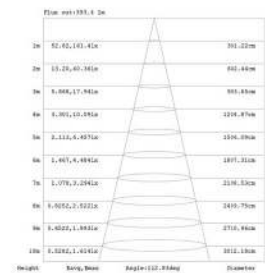

Accessories

- Full set accessory
 - 1.Cable*1
 - 2.Front Cap*1
 - 3.End Cap*1
 - 4.Plastic Clip*10
 - 5.Screw*10

Cutting Unit

- Custom length needed

CUT Every 50mm



Content
Waterproof
Strip Portfolio
Constant-Current
High Efficiency
Etri-Plus
2835
2016
2110
5050
3528
Side-Emit
3014
Multi-Color
Functional
Linear Light Source
AC
Under Water
Accessories
Packs
Linear Lighting