

# COB Series

## [60LEDs/M] (10W/M)

CRI Available  
80/ 90 /98

- Source by high output 2835 Top LED
- High efficiency and good in thermal management
- Self-encapsulated design offer five optional white light from 2300-6500K
- CRI 80+ , CRI 90+ and CRI 98+ are available




White Color

Indoor 120°

24V DC 5M REEL


Available B 20 F 65




Data	24V
Voltage	24V DC
Power	10W/m
Current	0.6A/m
Max. LM. Flux	1500LM/m
Dimensions	5000x8x1.2mm (196.85"x0.31"x0.05")
Waterproof IP	20,65

Ra	CCT.	Lm/M		
>80	5700-6500K	1500	WW-FLS102T29SW060B-24(WCP)-HR	
	3700-4250K	1500	WW-FLS102T29NW060B-24(WCP)-HR	
9000-3200K	2600-2900K	2300-2400K	1260	WW-FLS102T29WW060B-24(WCP)-HR
●	620nm-630nm	300	WW-FLS102T29SR060B-24(WCP)	
●	515nm-525nm	900	WW-FLS102T29SG060B-24(WCP)	
●	465nm-475nm	360	WW-FLS102T29SB060B-24(WCP)	
●	585nm-595nm	240	WW-FLS102T29AY060B-24(WCP)	


### Photometric Diagrams



### Illuminance Distribution



### Installation Diagram

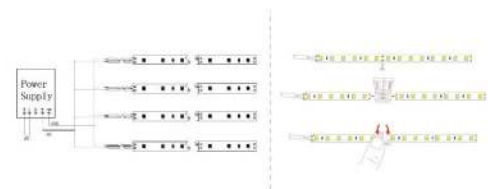

### Suitable Accessories



AL.Profiles	Surface-mounted	Recessed
WW-AP0813 WW-AP1714 WW-AP1804 WW-AP1918 WW-AP1919B WW-AP2114B	WW-AP1506 WW-AP1612B WW-AP1618B WW-AP1709B WW-AP2531 WW-AP3030	WW-AP2507B WW-AP2126 WW-AP2811

■ Recommend

Content  
Waterproof  
Strip Portfolio  
Constant-Current  
High Efficiency  
Etri-Plus  
COB  
2016  
2110  
5050  
3528  
Side-Emit  
3014  
Multi-Color  
Functional  
Linear Light Source  
AC  
Neon Flex  
Accessories  
Packs  
Linear Lighting